

AT&T Bell Laboratories
600 Mountain Avenue
Murray Hill, NJ 07974

Computing Science Technical Report No. 114

**GRAP — A Language for Typesetting Graphs
Tutorial and User Manual**

*Jon L. Bentley
Brian W. Kernighan*

December, 1984

GRAP — A Language for Typesetting Graphs Tutorial and User Manual

Jon L. Bentley
Brian W. Kernighan

AT&T Bell Laboratories
600 Mountain Avenue
Murray Hill, NJ 07974

ABSTRACT

GRAP is a language for describing plots of data. This graph of the 1984 age distribution in the United States



is produced by the GRAP commands

```
coord x 0,89 y 0,5
label left "Population" "(in millions)"
label bottom "1984 Age"
draw solid
copy "agepop.d"
```

(Each line in the data file `agepop.d` contains an age and the number of Americans of that age alive in 1984; the file is sorted by age.)

The GRAP preprocessor works with PIC and TROFF. Most of its input is passed through untouched, but statements between `.G1` and `.G2` are translated into PIC commands that draw graphs.

GRAP — A Language for Typesetting Graphs

Tutorial and User Manual

Jon L. Bentley
Brian W. Kernighan

AT&T Bell Laboratories
600 Mountain Avenue
Murray Hill, NJ 07974

1. Introduction

GRAP is a language for describing graphical displays of data. It provides such services as automatic scaling and labeling of axes, and `for` statements, `if` statements, and macros to facilitate user programmability. GRAP is intended primarily for including graphs in documents prepared on the Unix† operating system, and is only marginally useful for elementary tasks in data analysis.

Section 2 of this document is a tutorial introduction to GRAP; readers who find it slow going may wish to skim ahead. The examples in Section 3 illustrate the various kinds of graphs that GRAP can produce and some common GRAP idioms. Mundane matters about using GRAP are discussed in Section 4, and Section 5 contains a brief reference manual.

We have tried to illustrate good principles of statistics and graphical design in the graphs we present. In several places, though, good taste has lost to the necessity of illustrating GRAP capabilities. Readers interested in statistical integrity and taste should consult the literature.††

2. Tutorial

The following is a simple GRAP program†††

```
.G1
54.2
49.4
49.2
50.0
48.2
...
44.60
.G2
```

The single number on each line is the winning time in seconds for the men's 400 meter run, from the first modern Olympic Games (1896) to the nineteenth (1980). If the file `olymp.g` contains the text above, then typing the command


```
grap olymp.g | pic | troff >junk
```

creates a TROFF output file `junk` that contains the picture

† Unix is a Trademark of AT&T Bell Laboratories.

†† See, for instance, *Graphical Methods in Data Analysis* by Chambers, Cleveland, Kleiner and Tukey or *Visual Display of Quantitative Information* by Tufte.

††† Throughout this document we will show only the first five lines and the last line of data files; omitted lines are indicated by "...".

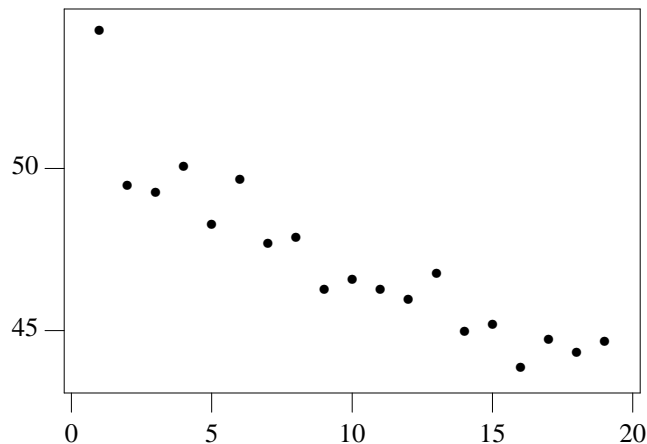

The graph shows the decrease in winning times from 54.2 seconds to 44.60 seconds. If the times are contained in the file `400mtimes.d`, we could produce the same graph with the shorter program

```
copy "400mtimes.d"
```

Writing `copy "fname"` in a GRAP program is equivalent to including the contents of file `fname` at that point in the file. (In the interests of compatibility with other programs, `include` is a synonym for `copy`.)


Each line in the file `400mpairs.d` contains two numbers, the year of the Olympics and the winning time:

```
1896 54.2
1900 49.4
1904 49.2
1908 50.0
1912 48.2
...
1980 44.60
```

If we plot this data with the program

```
copy "400mpairs.d"
```

the bottom (x) axis represents the year of the Olympics.

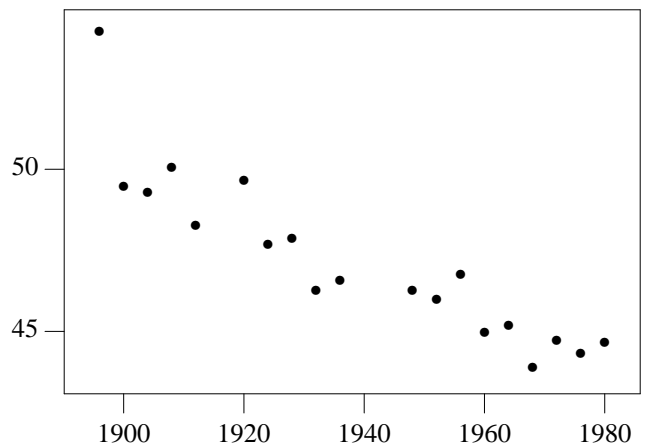


The “holes” in x -values reflect the fact that the 1916, 1940, and 1944 Olympics were cancelled due to war. Because the previous data (in `400mtimes.d`) had just one number per line, GRAP viewed it as a “time series” and supplied x -values of 1, 2, 3, ... before plotting the data as y -values. The input to the second

program has two values per line, so they are interpreted as (x,y) pairs.

Rather than a scatter plot of points, we might prefer to see the winning times connected by a solid line. The program

```
draw solid
copy "400mpairs.d"
```

produces the graph

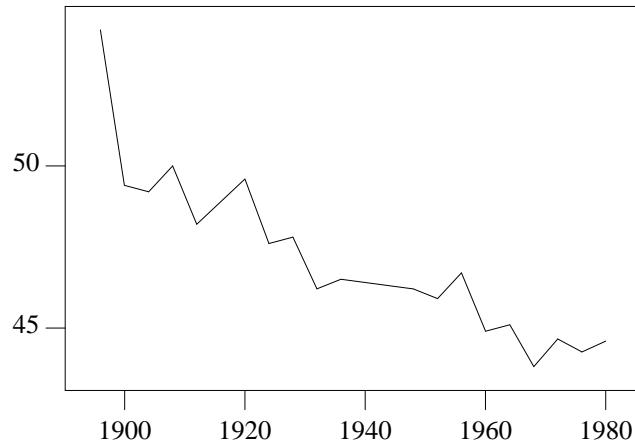


Eric Liddell of Great Britain won his gold medal in Paris in 1924 with a time of 47.6 seconds. (Remember “Chariots of Fire”?)

We can make the graph more attractive by modifying its frame and adding labels.

```
frame invis ht 2 wid 3 left solid bot solid
label left "Time" "(in seconds)"
label bot "Olympic 400 Meter Run: Winning Times"
draw solid
copy "400mpairs.d"
```


The frame command describes the graph’s bounding box: the overall frame (which has four sides) is invisible, it is 2 inches high and 3 inches wide (which happen to be the default height and width), and the left and bottom sides are solid (they could have been dashed or dotted instead). The labels appear on the left and bottom, as requested.

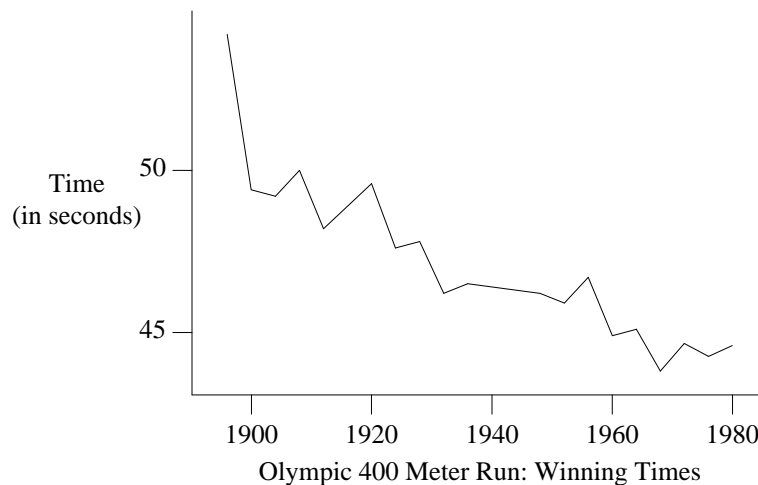

To set the range of each axis, GRAP examines the data and pads both dimensions by seven percent at each end. The `coord` (“coordinates”) command allows you to specify the range of one or both axes explicitly; it also turns off automatic padding.

```
frame invis ht 2 wid 3 left solid bot solid
label left "Time" "(in seconds)"
label bot "Olympic 400 Meter Run: Winning Times"
coord x 1894,1982 y 42, 56
draw solid
copy "400mpairs.d"
```


The y-axis now ranges from 42 to 56 seconds (a little more than before), and the x-axis from 1894 to 1982 (a little less).

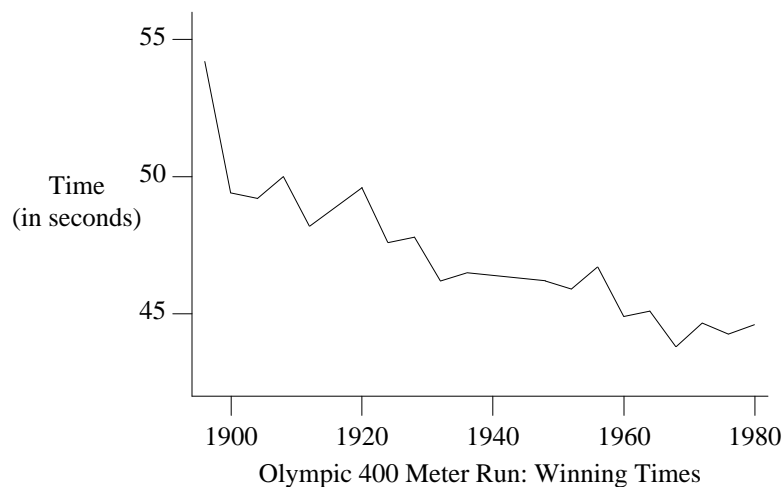

The ticks in the preceding graphs were generated by GRAP guessing at reasonable values. If you would rather provide your own, you may use the `ticks` command, which comes in the flavors illustrated below.

```
frame invis ht 2 wid 3 left solid bot solid
label left "Time" "(in seconds)" left .2
label bot "Olympic 400 Meter Run: Winning Times"
coord x 1894,1982 y 42, 56
ticks left out at 44 "44", 46, 48 "48", 50, 52 "52", 54
ticks bot in from 1900 to 1980 by 20
draw solid
copy "400mpairs.d"
```

The first `ticks` command deals with the left axis: it puts the ticks facing out at the numbers in the list. GRAP puts labels only at values with strings, except that when no labels at all are given, each number serves as its own label, as in the second `ticks` command. That command is for the bottom axis: it puts the ticks facing in at steps of 20 from 1900 to 1980. The command `ticks off` turns off all ticks. GRAP does its best to place labels appropriately, but it sometimes needs your help: the `left .2` clause moves the left label 0.2 inches further left to avoid the new ticks.

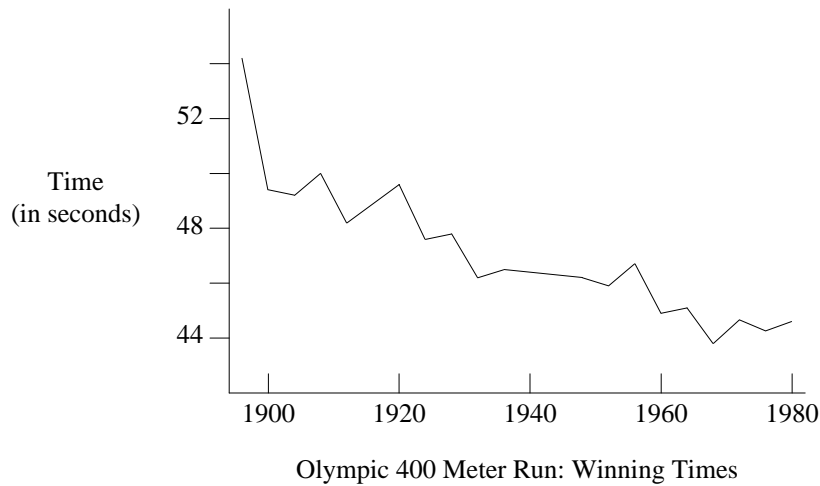

The file 400wpairs.d contains the times for the women's 400 meter race, which has been run only since 1964.

```
1964 52
1968 52
1972 51.08
1976 49.29
1980 48.88
```


To add these times to the graph, we use

```
frame invis ht 2 wid 3 left solid bot solid
label left "Time" "(in seconds)" left .2
label bot "Olympic 400 Meter Run: Winning Times"
coord x 1894,1982 y 42, 56
ticks left out at 44 "44", 46, 48 "48", 50, 52 "52", 54
ticks bot in from 1900 to 1980 by 20
draw solid
copy "400mpairs.d"
new dotted
copy "400wpairs.d"
"Women" size -3 at 1958,52
"Men" size -3 at 1910,47
```

The new command tells GRAP to end the old curve and to start a new curve (which in this case will be drawn with a dotted line). Text is placed on the graph by commands of the form

```
"string" at xvalue, yvalue
```

The size clauses following the quoted strings tell GRAP to shrink the characters by three points (absolute point sizes may also be specified). Strings are usually centered at the specified position, but can be adjusted by clauses to be illustrated shortly.

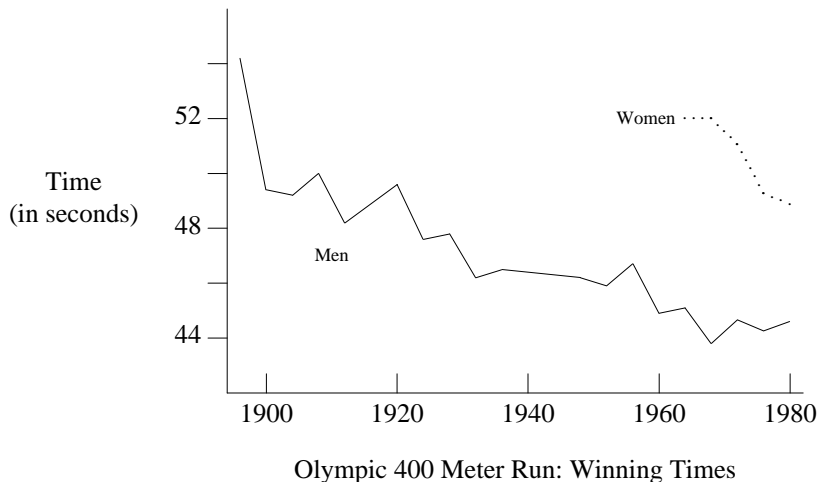


The file `phone.d` records the number of telephones in the United States from 1900 to 1970.

```
00 1.3
01 1.8
02 2.3
03 2.8
04 3.3
...
70 120.2
```

Each line gives a year and the number of telephones present in that year (in millions, truncated to the nearest hundred thousand). The simple GRAP program

```
copy "phone.d"
```


produces the simple graph

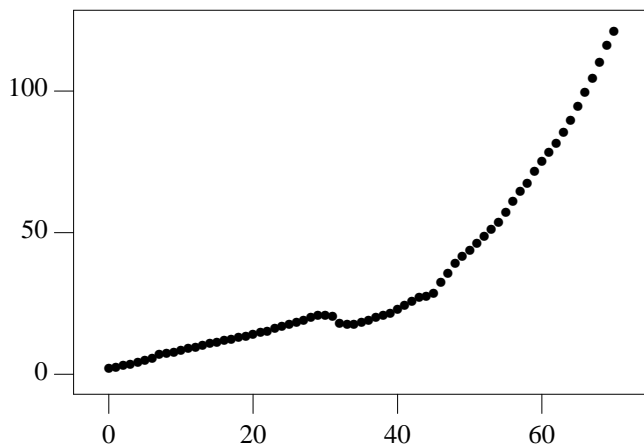

The number of telephones appears to grow exponentially; to study that we will plot the data with a logarithmic y-axis by adding `log y` to the `coord` command. We will also add cosmetic changes of labels, more ticks, and a solid line to replace the unconnected dots.


```
label left "Millions of" "Telephones" "(log scale)" left .5
coord x 0,70 y 1,130 log y
ticks left out at 1, 2, 5, 10, 20, 50, 100
ticks bot out at 0 "1900", 70 "1970"
ticks bot out from 10 to 60 by 10 "'%g"
draw solid
copy "phone.d"
```

The third `ticks` command provides a string that is used to print the tick labels. C programmers will recognize it as a `printf` format string; others may view the “`%g`” as the place to put the number and anything else (in this case just an apostrophe) as literal text to appear in the labels. To suppress labels, use the empty format string (“”). The program produces

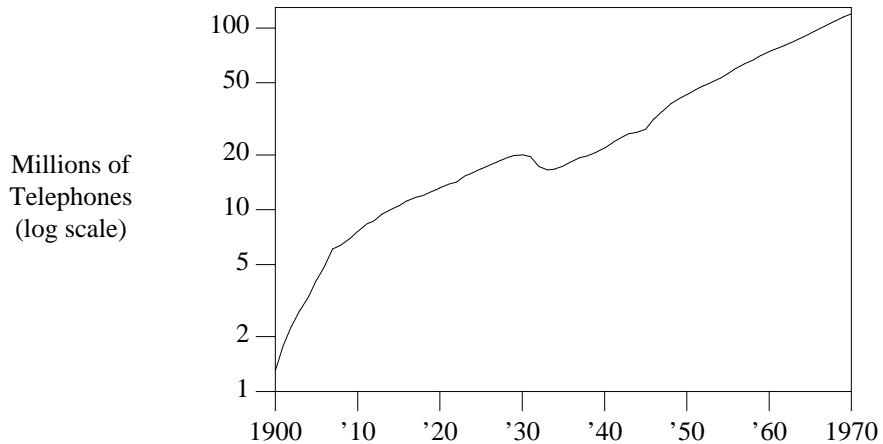

The number of telephones grew rapidly in the first decade of this century, and then settled down to an exponential growth rate upset only by a decrease in the Great Depression and a post-war growth spurt to return the curve to its pre-Depression line.

Our presentation so far has been to start with a simple GRAP program that illustrates the data, and then refine it. Later in this document we will ignore the design phase, and present rather complex graphs in their final form. Beware.

All the examples so far have placed data on the graph implicitly by copying a file of numbers (either a time series with one number per line or pairs of numbers). It is also possible to draw points and lines explicitly. The GRAP commands to draw on a graph are illustrated in the following fragment.


```
frame ht 2 wid 2
coord x 0,100 y 0,100
grid dotted bot from 20 to 80 by 20
grid dotted left from 20 to 80 by 20

"Text above"   above at 50,50
"Text rjust"  " rjust at 50,50
bullet at 80,90
vtick at 80,80
box at (80,70)
times at 80, 60

circle at 50,50
circle at 50,80 radius .25
line dashed from 10,90 to 30,90
arrow from 10,70 to 30,90

draw A solid
draw B dashed delta
next A at 10,10
next B at 10,20
next A at 50,20
next A at 90,10
next B at 50,30
next B at 90,30
```

The `grid` command is similar to the `ticks` command, except that grid lines extend across the frame. The next few commands plot text at specified positions. The plotting characters (such as `bullet`) are implemented as predefined macros — more on that shortly. Unlike arbitrary characters, the visual centers of the markers are near their plotting centers. The `circle` command draws a circle centered at the specified location. A radius in inches may be specified; if no radius is given, then the circle will be the small circle shown at the center of the graph. The `line` and `arrow` commands draw the obvious objects shown at the upper left.

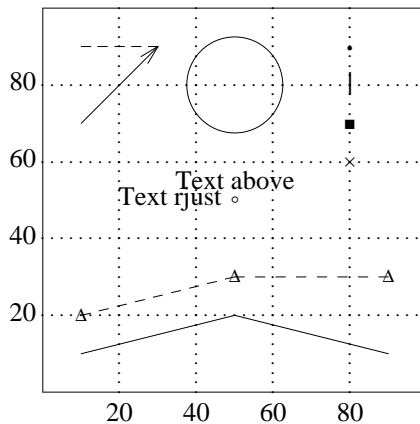

This figure also illustrates the combined use of the `draw` and `next` commands. Saying `draw A solid` defines the style for a connected sequence of line fragments to be called A. Subsequent commands of `next A at point add point` to the end of A. There are two such sequences active in the above example (A and B); note that their `next` commands are intermixed. Because the predefined string `delta` follows the specification of B, that string is plotted at each point in the sequence.

GRAP has numeric variables (implemented as double-precision floating point numbers) and the usual collection of arithmetic operators and mathematical functions; see the reference section for details.

GRAP provides the same rudimentary macro facility that PIC does:

```
define name X replacement text X
```

defines *name* to be the *replacement text*. *X* is any character that does not appear in the replacement; open and closing braces { } may also be used as delimiters. Any subsequent occurrence of *name* will be replaced by *replacement text*.

The replacement text of a macro definition may contain occurrences of \$1, \$2, etc.; these will be replaced by the corresponding actual arguments when the macro is invoked. The invocation for a macro with arguments is


```
name(arg1, arg2, ...)
```

Non-existent arguments are replaced by null strings.

The following GRAP program uses macros and arithmetic to plot crude approximations to the square and square root functions.

```
frame ht 1.5 wid 1.5
define square X ($1)*($1) X
define root { exp(log($1)/2) }
define P !
    times at i, square(i); i=i+1
    circle at j, root(j); j=j+5
!
i=1; j=5
P; P; P; P; P
```

Because GRAP has the square root function `sqrt`, the macro `root` is superfluous. The program produces



The `copy` command has a `thru` parameter that allows each line of a file to be treated as though it were a macro call, with the first field serving as the first argument, and so on. This is the typical GRAP mechanism for plotting files that are not stored as time series or as (x,y) pairs. We will illustrate its use on the file `states.d`, which contains data on the fifty states.

AK	1	401851
WY	1	469557
VT	1	511456
DE	1	594338
ND	1	652717
...		
CA	45	23667902


The first field is the postal abbreviation of the state's name (Alaska, Wyoming, Vermont, ...), the second field is the number of Representatives to Congress from the state after the 1981 reapportionment, and the third field is the population of the state as measured in the 1980 Census. The states appear in increasing

order of population.

We will first plot this data as population, representative pairs. (In the `coord` statement, `log log` is a synonym for `log x log y`.)

```
label left "Representatives" "to Congress" left .3
label bot "Population (Millions)"
coord x .3,30 y .8,50 log log
define PlotState X circle at ($3/1e6,$2) X
copy "states.d" thru PlotState
```

Although the population is given in persons, the `PlotState` macro plots the population in millions by dividing the third input field by one million (written in exponential notation as $1e6$, for 1×10^6).

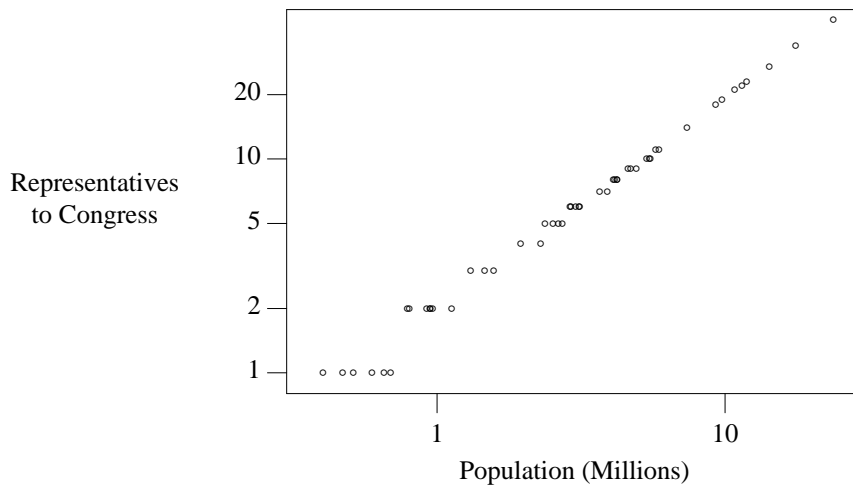


Using `circle` as a plotting symbol displays overlapping points that are obscured when the data is plotted with bullets. The representation of a state is roughly proportional to its population, except in the very small states.

Our next plot will use the state's rank in population as the x -coordinate and two different y -coordinates: population and number of representatives. We will use two `coord` commands to define the two coordinate systems `pop` and `rep`. We then explicitly give the coordinate system whenever we refer to a point, both in constructing axes and plotting data.

```
frame ht 3 wid 3.5
label left "Population" "in Millions" "(Plotted as \(\bullet\))"
label bot "Rank In Population" up .2
label right "Representatives" "(Plotted as \(\square\))"
coord pop x 0,51 y .2,30 log y
coord rep x 0,51 y .3,100 log y
ticks left out at pop .3, 1, 3, 10, 30
ticks bot out at pop 1, 50
ticks right out at rep 1, 3, 10, 30, 100
thisrank=50
copy "states.d" thru X
  bullet at pop thisrank,$3/1e6
  square at rep thisrank,$2
  thisrank=thisrank-1
X
```

The `copy` statement in the program uses an *immediate macro* enclosed in `X`'s and thus avoids having to name a macro for this task. Because the program assumes that the states are sorted in increasing order of population, it generates `thisrank` internally as a GRAP variable. The program produces

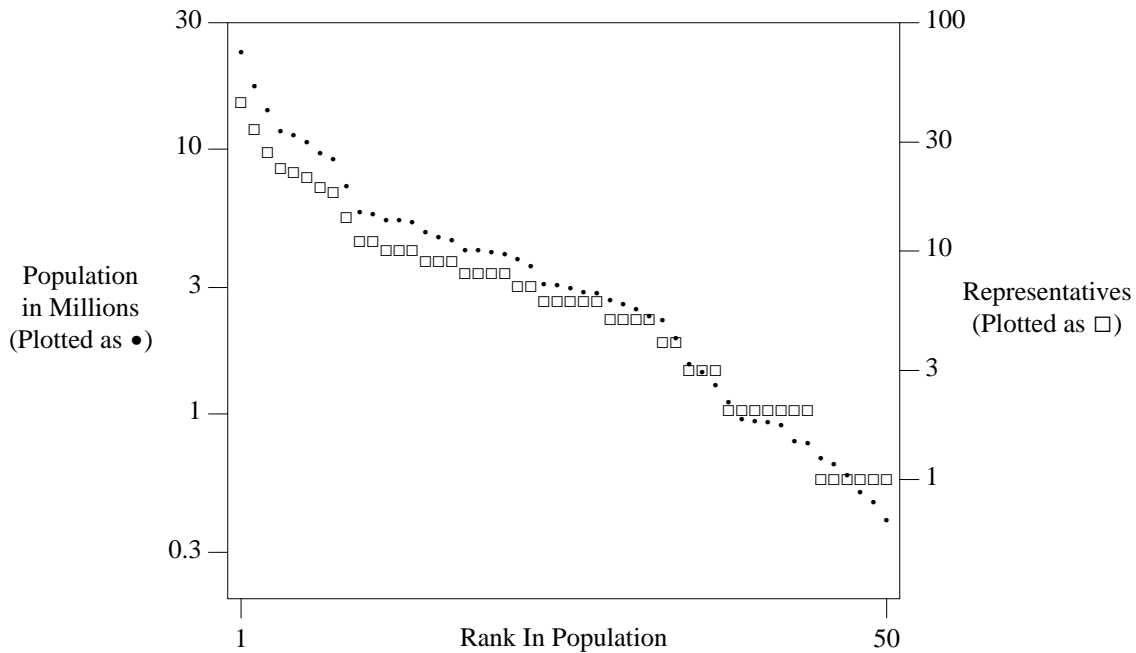


The plotting symbols were chosen for contrast in both shape and shading. This graph also indicates that representation is proportional to population. Once we see this graph, though, we should realize that we don't really need two coordinate systems: we can relate the two by dividing the population of the U.S. — about 226,000,000 — by the number of representatives — 435 — to see that each representative should count as 520,000 people. If the purpose of this graph were to tell a story about American politics rather than to illustrate multiple coordinate systems, it should be redrawn with a single coordinate system.

Many graphs plot both observed data and a function that (theoretically) describes the data. There are many ways to draw a function in GRAP: a series of `next` commands is tedious but works, as does writing a simple program to write a data file that is subsequently read and plotted by the GRAP program. The `for` statement often provides a better solution. This GRAP program

```
frame ht 1 wid 3
draw solid
pi=atan2(0,-1)
for i from 0 to 2*pi by .1 do { next at i, sin(i) }
```

produces

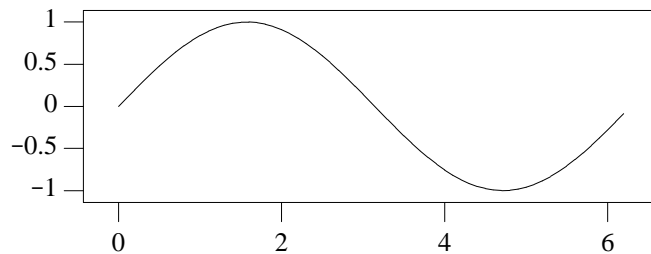

The `for` statement uses the same syntax as the `ticks` statement, but the `from` keyword can be replaced by `=`, which will look more familiar to programmers. It varies the index variable over the specified range and for each value executes all statements inside the delimiter characters, which use the same rules as macro delimiters. It is, of course, useful for many tasks beyond plotting functions.

The `if` statement provides a simple mechanism for conditional execution. If a file contains data on both cities and states (and lines describing states have “S” in the first field), it could be plotted by statements like

```
if "$1" == "S" then {  
    PlotState($2,$3,$4)  
} else {  
    PlotCity($2,$3,$4,$5,$6)  
}
```

The `else` clause is optional; delimiters use the same rules as macros and `for` statements.

3. A Collection of Examples

The previous section covered the GRAP commands that are used in common graphs. In this section we'll spend less time on language features, and survey a wider variety of graphs. These examples are intended more for browsing and reference than for straight-through reading. You should be prepared to refer to the manual in Section 5 when you stumble over a new GRAP feature.


The file `cars.d` contains the mileage (miles per gallon) and the weight (pounds) for 74 models of automobiles sold in the United States in the 1979 model year.

```
22 2930  
17 3350  
22 2640  
17 2830  
23 2070  
...  
17 3170
```

The trivial GRAP program

```
copy "cars.d"
```

produces

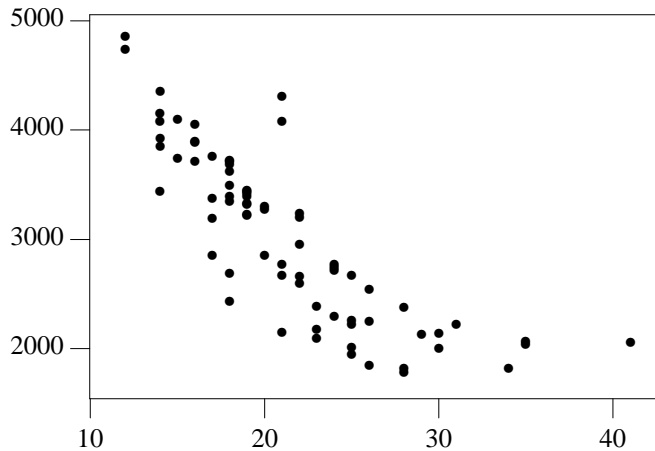


This graph shows that weights bottom out somewhat below 2000 pounds and that heavier cars get worse mileage; it is hard to say much more about the relationship between weight and mileage.

The next graph provides labels, uses circles to expose data hidden in the clouds of bullets, and re-expresses the x -axis in gallons per mile. It also changes the point size and vertical spacing to a size appropriate for camera-ready journal articles and books; the size changes should be made outside the GRAP program. The `.ft` command changes to a Helvetica font, which some people prefer for graphs.

```
.ft H
.ps -2
.vs -2
frame ht 2.5 wid 2.5
label left "Weight" "(Pounds)" left .3
label bot "Gallons per Mile"
coord x 0,.10 y 0,5000
ticks left from 0 to 5000 by 1000
ticks bot from 0 to .10 by .02
copy "cars.d" thru X circle at 1/$1, $2 X
.vs +2
.ps +2
.ft
```

GRAP supports logarithmic re-expression of data with the `log` clause in the `coord` statement; any other re-expression of data must be done with GRAP arithmetic, as above.

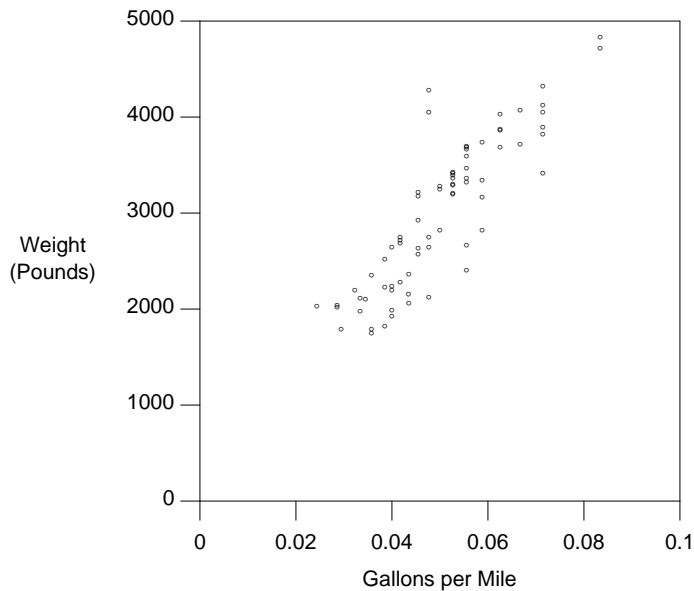


This graph shows that gallons per mile is roughly proportional to weight. (The two outliers near 4000 pounds are the Cadillac Seville and the Oldsmobile 98.)

In *Visual Display of Quantitative Information*, Tufte proposes the “dot-dash-plot” as a means for maximizing data ink (showing the two-dimensional distribution and the two one-dimensional marginal distributions) while minimizing what he calls “chart junk” — ink wasted on borders and non-data labels. His preference is easy to express in GRAP:

```
frame invis ht 3 wid 3
coord x 0,.10 y 0,5000
copy "cars.d" thru X
  tx=1/$1; ty=$2
  bullet at tx,ty
  tick bot at tx ""
  tick left at ty ""
X
```

Although visually attractive, we do not find the resulting graph as useful for interpreting the data.

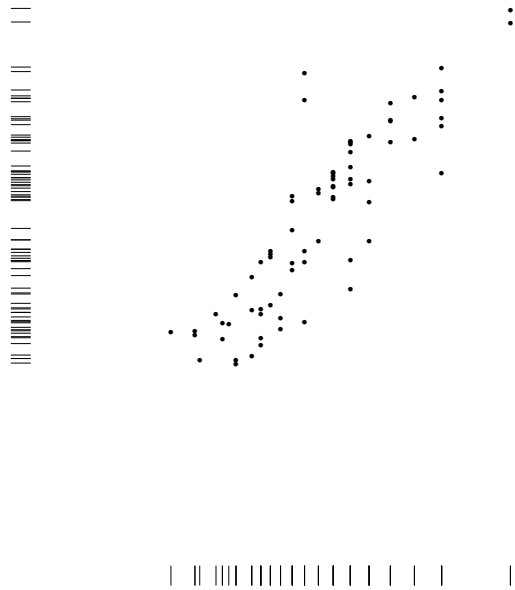

Tufte's graph does point out two facts that are not obvious in the previous graphs: there is a gap in car weights near 3000 pounds (exhibited by the hole in the y-axis ticks), and the gallons per mile axis is regularly structured (the ticks are the reciprocals of an almost dense sequence of integers). The reader may decide whether those insights are worth the decrease in clarity.


Throughout the twentieth century, horses, cars and people have gotten faster; let's study those improvements. For horses, we'll consider the winning times of the Kentucky Derby from 1909 to 1983, in the file `speedhorse.d`:

```
126.2
126.4
125.0
129.4
124.8
...
122.2
```

The program

```
label left "Winning Time" "(seconds)" left .3
label bot "Kentucky Derby, 1909 to 1983"
bestsofar=1000 # Greater than first time
year=09
copy "speedhorse.d" thru X
  bullet at year,$1
  bestsofar=min(bestsofar,$1)
  line from year,bestsofar to year+1,bestsofar
  year=year+1
X
```

produces the graph

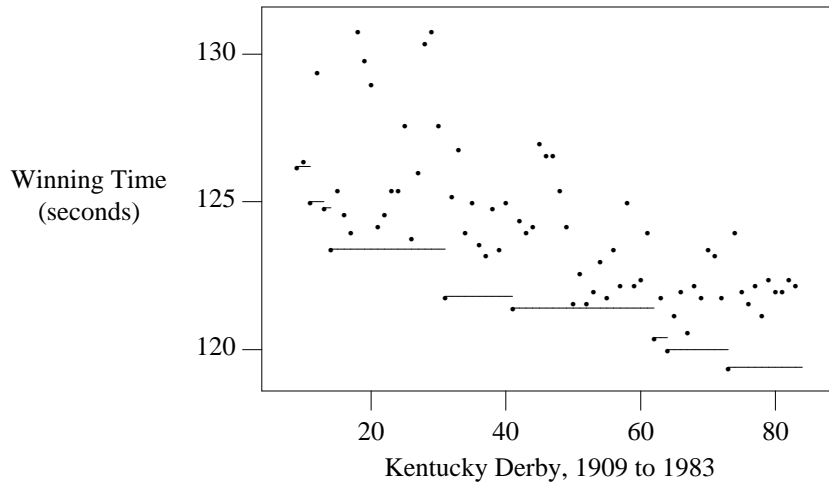

Each race is recorded with a bullet and record times are marked by horizontal lines. Secretariat is the only horse to have run the one-and-a-quarter-mile race in under two minutes; he won in 1973 in 1:59.4.


For automobiles we will study the world land speed record (even though those vehicles are by now just low-flying airplanes). The file `speedcar.d` lists years in which speed records were set and the record set in that year, in miles per hour averaged over a one-mile course.

```
06      127
10      131
11      141
19      149
20      155
...
83      633
```

We will plot the data with the following GRAP program, which uses nested braces in the `copy` and `if` statements.


```
label bot "World Land Speed Record"
label left "Miles" "per" "Hour" left .4
ticks bot out from 10 to 70 by 10 ""
ticks bot out at 0 "1900", 40 "1940", 80 "1980"
firstrecord=1
copy "speedcar.d" thru {
  if firstrecord==1 then {
    firstrecord=0
  } else {
    line from lastyear,lastrec to $1,lastrec
  }
  lastyear=$1; lastrec=$2
}
line from lastyear,lastrec to 84,lastrec
```

Each record line is drawn after the *next* record is read, because the program must know when the record was broken to draw its line. The `if` statement handles the first record, and the extra `line` command extends the last record out to the current date.

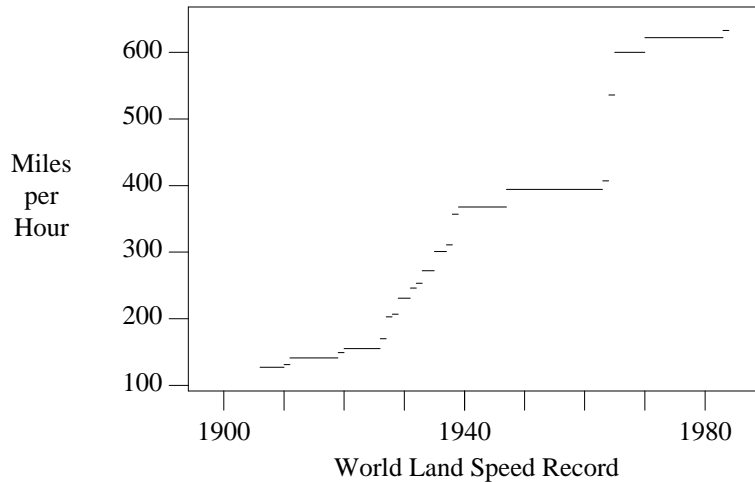

The horizontal lines reflect the nature of world records: they last until they are broken. The records could also have been plotted by a scatterplot in which each point represents the setting of a record, but it would be misleading to connect adjacent points with line segments (which is what we inappropriately did in the graphs of the Olympic 400 meter run).

The following graph shows the world record times for the one mile run; because its GRAP program is so similar to its automotive counterpart, we won't show the program or data.

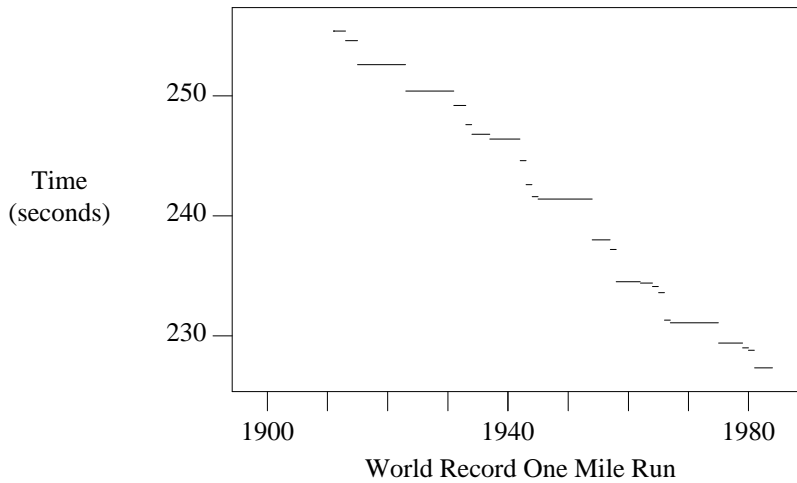

The three graphs show three different kinds of changes. Although horses are getting faster, they appear to be approaching a barrier near two minutes. Cars show great jumps as new technologies are introduced followed by a plateau as limits of the technology are reached. Milers have shown a fairly consistent linear improvement over this century, but there must be an asymptote down there somewhere.


The next file gives the median heights of boys in the United States aged 2 to 18, together with the fifth and ninety-fifth percentiles.

2	82.5	86.8	94.4
3	89.0	94.9	102.0
4	95.8	102.9	109.9
5	102.0	109.9	117.0
6	107.7	116.1	123.5
...			
18	165.7	176.8	187.6

The heights are given in centimeters (1 foot = 30.48 centimeters). The trivial program

copy "boyhts.d"

displays the data as

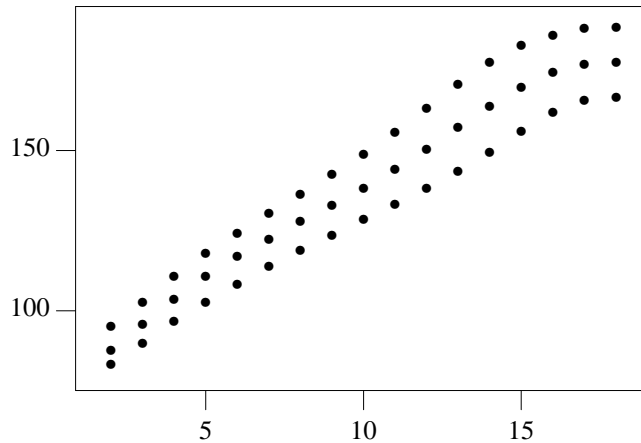

Because there are four numbers on each input line, the first is taken as an x-value and the remaining three are plotted as y-values.

The three curves appear to be roughly straight (at least up to age 16), so it makes sense to fit a line through them. We will use the standard least squares regression in which

$$slope = \frac{n\sum xy - \sum x \sum y}{n\sum x^2 - (\sum x)^2}$$

(where the summations range over all n x and y values in the data set) and the y-intercept is

$$\frac{\sum y - slope \times \sum x}{n}$$


The following GRAP program boldly (and rather foolishly) implements that formula.

```

label left "Heights in Feet" "(Median and" "fifth percentiles)"
label bot "Heights of Boys in U.S., ages 2 to 18"
cmpft = 30.48 # Centimeters per foot
minx = 1e12; maxx = -1e12
n = sigx = sigx2 = sigy = sigxy = 0
copy "boyhts.d" thru X
  line from $1,$2/cmpft to $1,$4/cmpft
  ty = $3/cmpft
  bullet at $1,ty
  n = n+1
  sigx = sigx+$1; sigx2 = sigx2+$1*$1
  sigy = sigy+ty; sigxy = sigxy+$1*ty
  minx = min(minx,$1); maxx = max(maxx,$1)
X
# Calculate least squares fit and draw it
slope = (n*sigxy - sigx*sigy) / (n*sigx2 - sigx*sigx)
inter = (sigy - slope*sigx) / n
# print slope; print inter
line from minx,slope*minx+inter to maxx,slope*maxx+inter

```

It plots the extreme fifth percentiles as a bar through the median, which is plotted as a bullet. All heights are converted to feet before plotting and calculating the regression line.

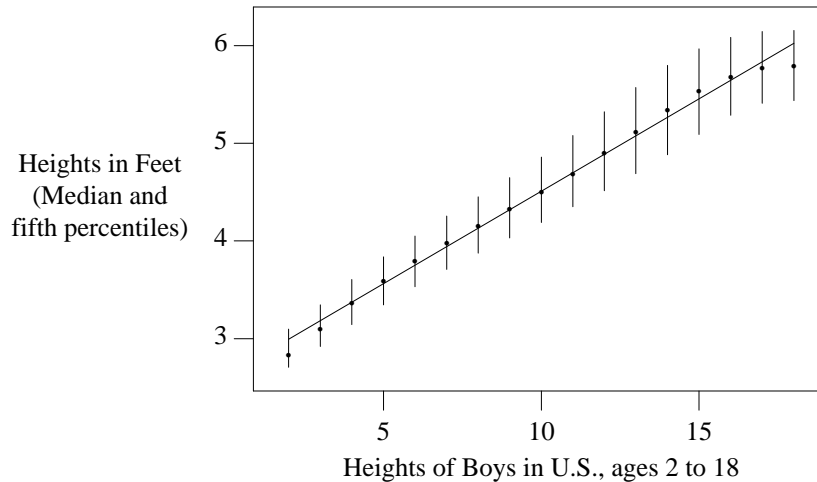

GRAP print statements write on `stderr` as they are processed by GRAP; their single argument can be either an expression or a string. The `print` statements (which are commented out in the above GRAP program) at one time showed that the regression line is

$$\text{Height in Feet} = 2.61 + .19 \times \text{Age}$$

Thus for most American boys between 3 and 16, you may safely assume that they started out life at 2 feet 7 inches and grew at the rate of two and a quarter inches per year.

This program probably misapplies GRAP; if you really want to perform least squares regressions on data, you should usually use a simple AWK program like

```
awk '
    { x+=$1; x2+=$1*$1; y+=$2; xy+=$1*$2 }
    END { slope=(NR*xy-x*y)/(NR*x2-x*x); print (y-slope*x)/NR, slope }
    ' $*
```

(Be warned, though, that this program is not numerically robust.)


While we're on the subject of fitting straight lines to data, we'll redraw three graphs from J. W. Tukey's *Exploratory Data Analysis*. The file `usapop.d` records the population of the United States in millions at ten-year intervals.

```
1790  3.93
1800  5.31
1810  7.24
1820  9.64
1830 12.87
...
1950 150.7
```

Tukey's first two graphs indicate that the later population growth was linear while the early growth was exponential. The following GRAP program plots them as a pair, using `graph` commands to place internally unrelated graphs adjacent to one another.

```
graph Linear
  coord x 1785,1955 y 0,160
  label left "Population" "in Millions" left .2
  label right "Linear Scale," "Linear Fit"
  ticks bot off
  copy "usapop.d"
  define fit X 35 + 1.4*($1-1870) X
  line from 1850,fit(1850) to 1950,fit(1950)
graph Exponential with .Frame.n at Linear.Frame.s -(0,.05)
  coord x 1785,1955 y 3,160 log y
  label left "Population" "in Millions" left .2
  label right "Logarithmic Scale," "Exponential Fit"
  copy "usapop.d"
  define fit X exp(0.75 + .012*($1-1800)) X
  line from 1790,fit(1790) to 1920,fit(1920)
```


The statements defining each graph are indented for clarity. The second graph has the northern point of its frame 0.05 inch below the southern point of the frame of the first graph; the with clause is passed directly through to PIC without being evaluated for macros or expressions. The names of both graphs begin with capital letters to conform to PIC syntax for labels.

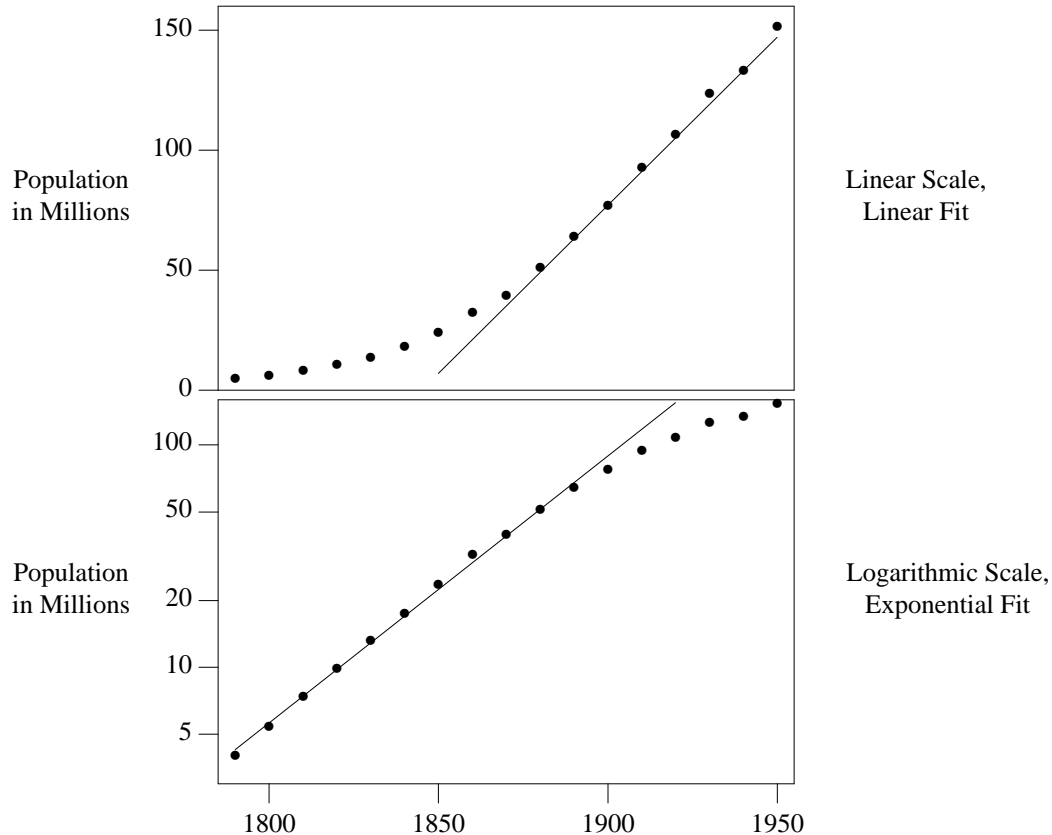

Polynomial functions lie between the linear and exponential functions; Tukey shows how a seventh-degree polynomial provides a better (and longer) fit to the early population growth.

```
label left "Population" "in Millions" left .2
label right "$x$ re-expressed as" "" \
"$space 0 left ( {date - 1600} over 100 right ) sup 7$" left 1.2
define newx X exp(7*(log(($1-1600)/100))) X
ticks bot out at newx(1800) "1800", newx(1850) "1850",\
newx(1900) "1900"
copy "usapop.d" thru X
if $1<=1900 then { bullet at newx($1),$2 }
X
```

This program re-expresses the *x*-axis with GRAP arithmetic and uses an *if* statement to graph only part of the data file. It produces

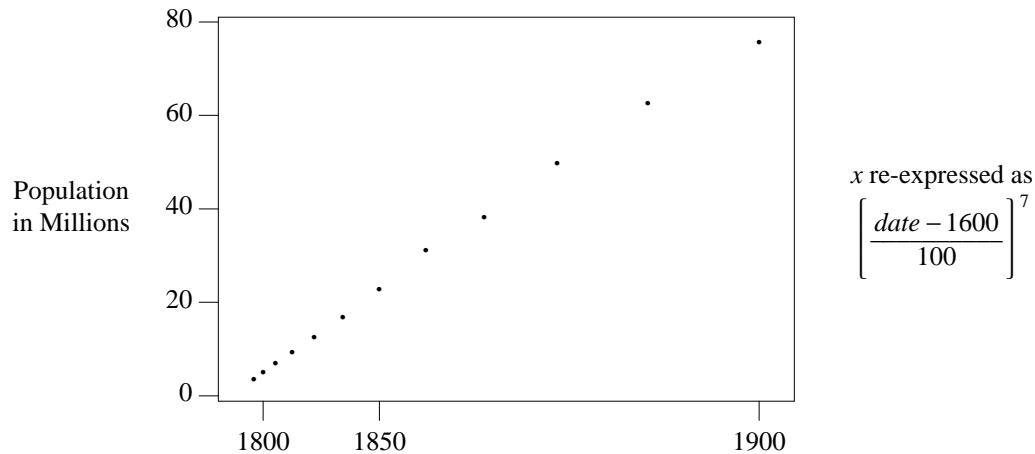

The EQN *space 0* clause is necessary to keep EQN from adding extra space that would interfere with positions computed by GRAP; see Section 4.


The file *army.d* contains four related time series describing the United States Army.

```
40 16 .9 249 1
42 190 12 2867 1
43 521 36 6358 55
44 692 47 7144 71
45 772 62 7283 90
...
83 80 9 606 67
```

The first field is the year; the next four fields give the number of male officers, female officers, enlisted males and enlisted females, each in thousands. (Actually, there were no female enlisted personnel in the Army until 1943; the value 1 in 1940 and 1942 is just a placeholder, since GRAP has no mechanism for handling missing data.) The following GRAP program draws the four series with four different sets of *draw* and *next* commands.


```
coord x 38,85 y .8,10000 log y
label bot "U.S. Army Personnel"
label left "Thousands" left .3
draw of solid # Officers Female
draw ef dashed # Enlisted Female
draw om dotted # Officers Male
draw em solid # Enlisted Male
copy "army.d" thru X
  next of at $1,$3
  next ef at $1,$5
  next om at $1,$2
  next em at $1,$4
X
copy thru % "$1 $2" size -3 at 60,$3 % until "XXX"
Enlisted Men 1200
Male Officers 140
Enlisted Women 12
Female Officers 2.5
XXX
```

The program labels the lines by copying immediate data; the program is therefore shorter to write and easier to change. The delimiter string XXX in the until clause could be deleted in this graph: the .G2 line also denotes the end of data. Even though that string is enclosed in quotes, it may not contain spaces. The y-positions of the labels are the result of several iterations.

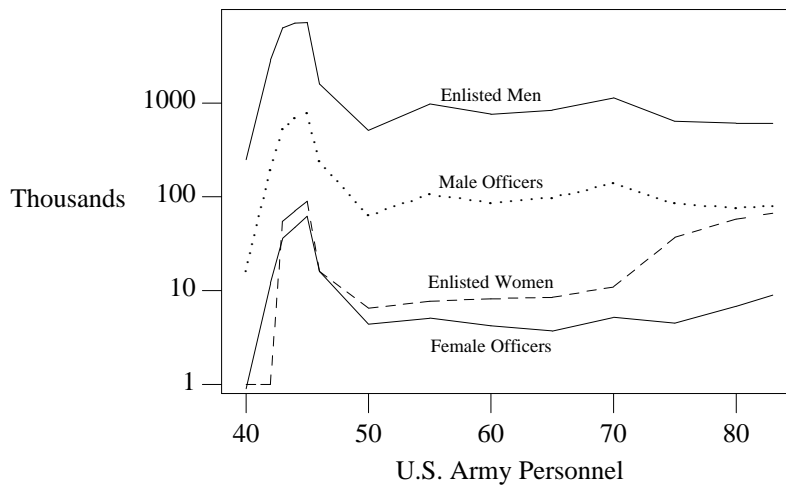

This data can tell many stories: the buildup during the Second World War is obvious, as is the exodus after the war; increases during Korea and Vietnam are also apparent. We will consider a different story: the ratio of enlisted men to the three other classes of personnel. There are several ways to plot this data (the most obvious graph uses three time series showing how the ratios change over time, and is left as an exercise for the reader).

We will instead construct a graph that gives little insight into this data, but illustrates a general method that is quite useful in conjunction with GRAP. The graph is a “scatterplot vector” that shows how one variable (the number of enlisted men) varies as a function of the other three. Breaking with tradition, we first show the final graphs, all of which have logarithmic scales.

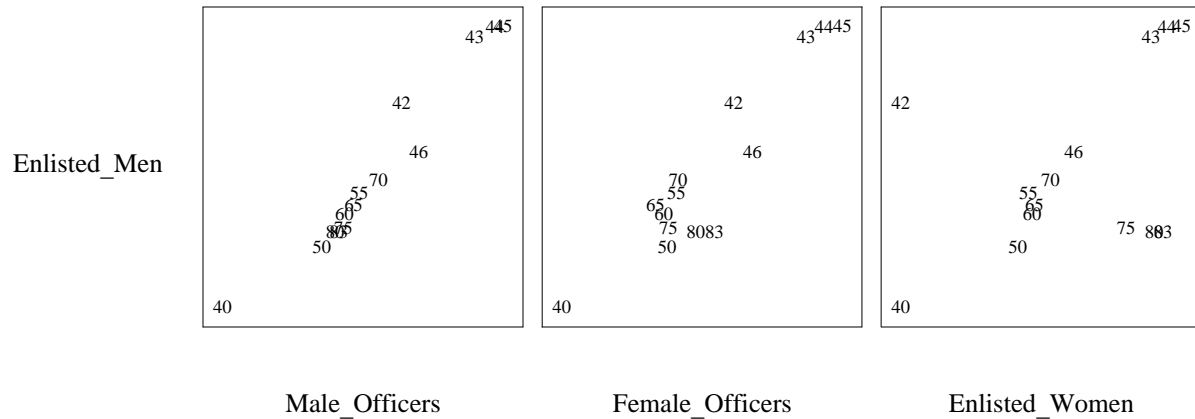

The number of enlisted men is almost linearly related to the number of male officers, it is somewhat related to the number of female officers, and it varies widely as a function of the number of enlisted women.

Much more interesting than the graph itself is the method we used to produce it. We wrote a miniature “compiler” that accepts as its “source language” a description of a scatterplot vector and produces as “object code” a GRAP program to draw the graph. The source program for the above example is

```
file "army.d"
log x log y
symbol "\s-3$1\s+3"
y $4 Enlisted_Men
x $2 Male_Officers
x $3 Female_Officers
x $5 Enlisted_Women
```

The program lists several global attributes of the graph, the y-variable to be plotted, and as many x-variables as are desired; with each variable is its field in the file and a descriptive string. The language is “compiled” by the following AWK program.

```
awk '
# Parse all commands
$1=="file"      { fname=$2 }
$1=="log"      { logtext=$0 }
$1=="symbol"   { symtext=$2 }
$1=="y"       { yfield=$2; ylabel=$3 }
$1=="x"       { n++; xfield[n]=$2; xlabel[n]=$3 }
# Generate n graphs
END {
print ".G1"
for (i=1; i<=n; i++) {
if (s!="") print "#"
print "graph A" s
s=" with .Frame.w at A.Frame.e +(.1,0)"
print "frame ht " 5/n " wid " 5/n
print "label bot \" " xlabel[i] "\"\"
if (i==1) print "label left \" " ylabel "\"\"
if (logtext!="") print "coord " logtext
print "ticks off"
print "copy " fname " thru X " symtext\
" at " xfield[i] ", " yfield " X"
}
print ".G2"
}' $1
```

Running this program on the above description produces the following output, which is typically piped

directly to GRAP.

```
graph A
frame ht 1.66667 wid 1.66667
label bot "Male_Officers"
label left "Enlisted_Men"
coord log x log y
ticks off
copy "army.d" thru X "\s-3$1\s+3" at $2,$4 X
#
graph A with .Frame.w at A.Frame.e +(.1,0)
frame ht 1.66667 wid 1.66667
label bot "Female_Officers"
coord log x log y
ticks off
copy "army.d" thru X "\s-3$1\s+3" at $3,$4 X
#
graph A with .Frame.w at A.Frame.e +(.1,0)
frame ht 1.66667 wid 1.66667
label bot "Enlisted_Women"
coord log x log y
ticks off
copy "army.d" thru X "\s-3$1\s+3" at $5,$4 X
```


The generated program uses the PIC trick of re-using the same name (A) for several objects.

Although the program above is merely a toy, “minicompliers” can produce useful preprocessors for GRAP. The `scatmat` program, for instance, is a 90-line AWK program that reads a simple input language and produces as output a GRAP program to produce a “scatterplot matrix”, which is a handy graphical device for spotting pairwise interactions among several variables. If GRAP lacks a feature you desire, consider building a simple preprocessor to provide it. An alternative is to define macros for the task; which approach is best depends strongly on the job you wish to accomplish.

The next graph uses iterators to make a graph without reading data from a file. Rather, its “data” is a function of two variables that describes a derivative field and a function of one variable that describes one solution to the differential equation.

```
frame ht 2.5 wid 2.5
coord x 0,1 y 0,1
label bot "Direction field is  $y' = x^2 / y$ "
label left " $y = \sqrt{(2x^3 + 1)/3}$ " right .3
ticks left in 0 at 0,1
ticks bot in 0 at 0,1
len=.04
for tx from .01 to .91 by .1 do {
  for ty from .01 to .91 by .1 do {
    deriv=tx*tx/ty
    scale=len/sqrt(1+deriv*deriv)
    line from tx,ty to tx+scale,ty+scale*deriv
  }
}
draw solid
for tx = 0 to 1 by .05 do {
  next at tx, sqrt((2*tx*tx*tx+1)/3)
}
```

The left label uses EQN text between the \$\$ delimiters. The variable `scale` ensures that all lines in the direction field are the same length. The `in` clauses in the `ticks` statements specify that the ticks go in zero inches to avoid overprinting. The variables `tx` and `ty` are so named because `x` and `y` are reserved words for the `coord` statement.

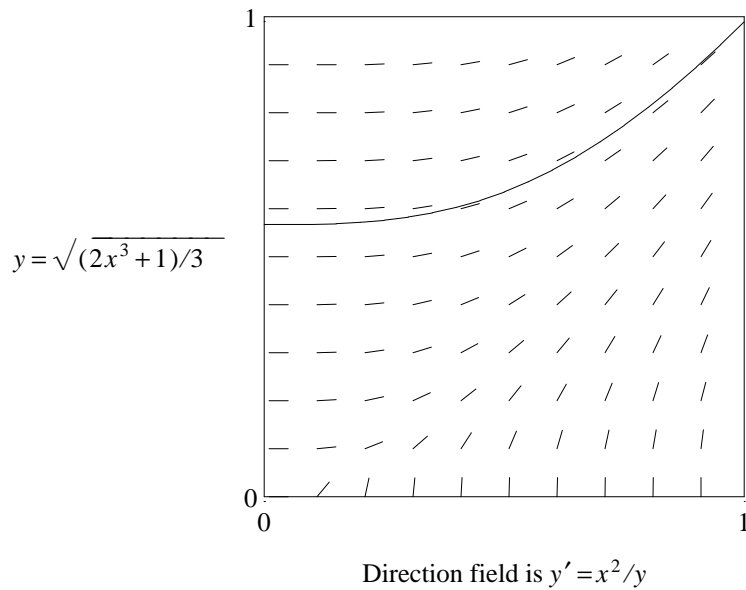

Programmers familiar with floating point arithmetic may be surprised that the above graph is correct. Because of roundoff error, iteration “from 0 to 1 by .05” usually produces the values 0, .05, .10, ..., .95. GRAP uses a “fuzzy test” in the for statement to avoid that problem, which may in turn introduce other problems. Such problems may be avoided by iterating over an integer range and incrementing a non-integer value within the loop.


Most of the data we have seen so far is inherently two (or more) dimensional. As an example of one-dimensional data, we will return to the populations of the fifty states, which is the third field in the file states.d introduced on page 9; the file is sorted in increasing order of population. Our first graph takes the most space, but it also gives the most information.

```

frame ht 4 wid 5
label left "Rank in" "Population"
label bot "Population (Millions)"
label top "$log sub 2$ (Population)"
coord x .3,30 y 0,51 log x
define L % exp($1*log(2))/1e6 "$1" %
ticks bot out at .5, 1, 2, 5, 10, 20
ticks left out from 10 to 50 by 10
ticks top out at L(19), L(20), L(21), L(22), L(23), L(24)
thisy=50
copy "states.d" thru X
"$1" size -4 at ($3/1e6, thisy)
thisy=thisy-1
X
line dotted from 15.3,1 to .515,50

```

The L macro (for Label) with input parameter X evaluates to the number $2^X/1,000,000$ followed by the string "X" (the ticks command expects a number followed by a string label).

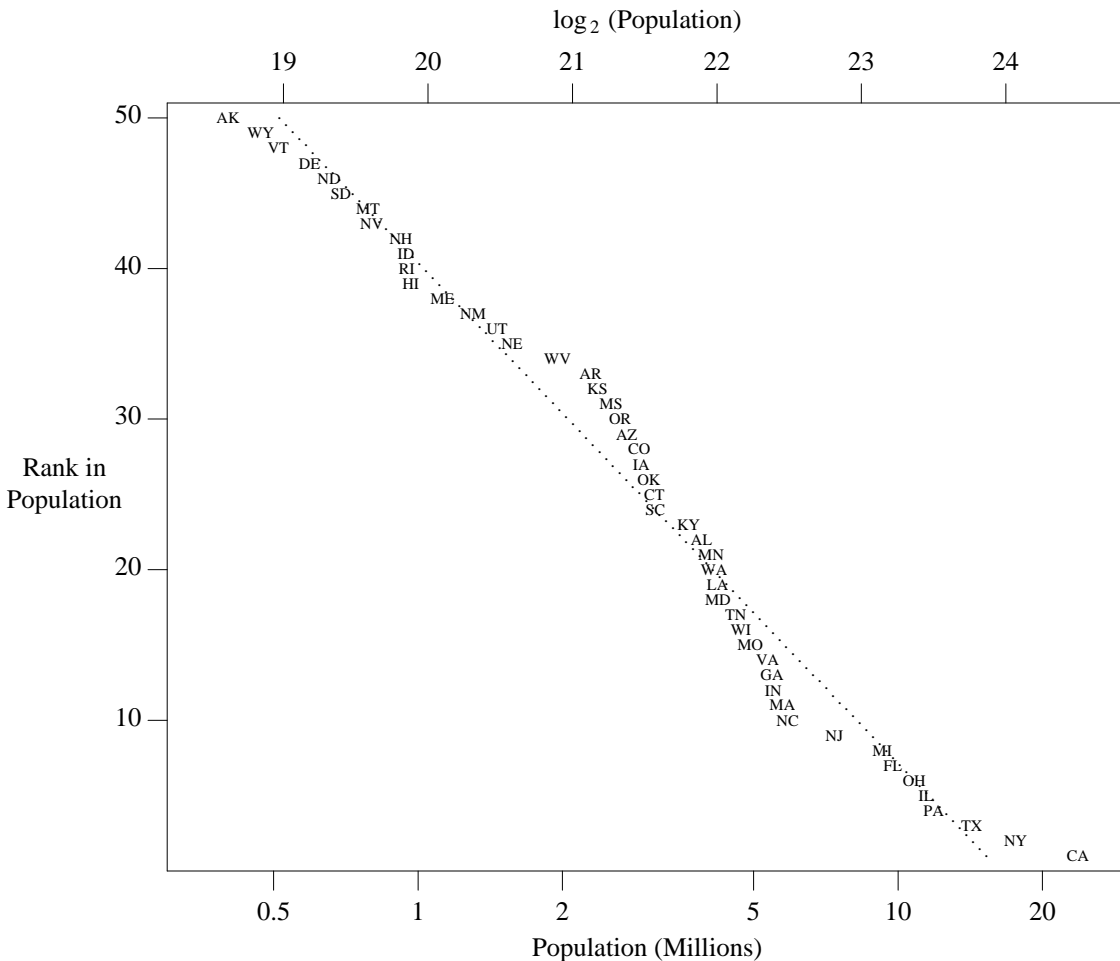

The dotted line is the least squares regression

$$\log_{10} \text{Population} = 7.214 - .03 \times \text{Rank}$$


which gives 15.3 million as the population of the largest state and .515 million as the population of the smallest state. It says that population drops by a factor of two every ten states (compare the top and left scales). As sloppy as the exponential fit is, though, it is a much better fit to this data than a Zipf's Law curve is (drawing that curve is left as an exercise for the reader).

The next graph is a more standard representation of one-dimensional data.

```

frame invis ht .3 wid 5 bottom solid
label bot "Populations (in Millions) of the 50 States"
coord x .3,30 y 0, 1 log x
ticks bot out at .5, 1, 2, 5, 10, 20
ticks left off
copy "states.d" thru X vtick at ($3/1e6,.5) X
    
```


The markers were chosen to be vticks because they denote only an x-value.

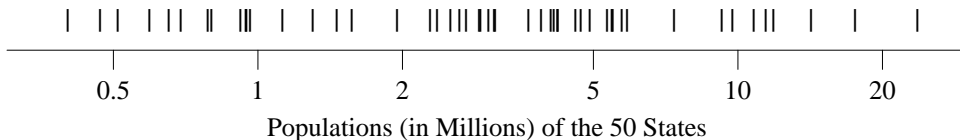

The next one-dimensional graph uses the state's name as its marker; to reduce overprinting the graph is "jittered" by using a random number as a y-value.

```
frame invis ht 1 wid 5 bottom solid
label bot "Populations (in Millions) of the 50 States"
coord x .3,30 y 0,1000 log x
ticks bot out at .5, 1, 2, 5, 10, 20
ticks left off
copy "states.d" thru X "$1" size -4 at ($3/1e6,100+900*rand()) X
```

The function rand() returns a pseudo-random real number chosen uniformly over the interval [0,1).

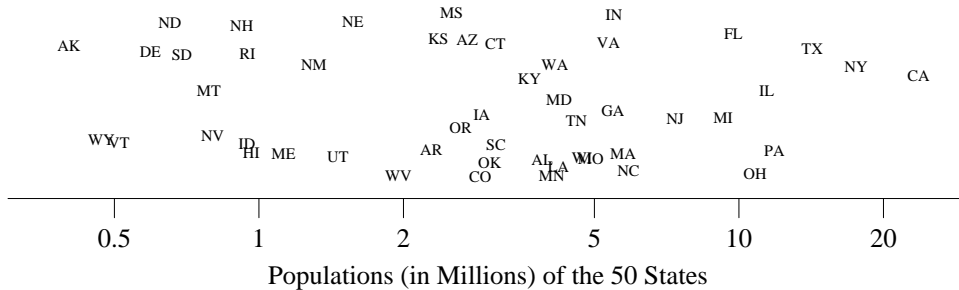

This graph is too cluttered; circles would have been a better choice as a plotting symbol (bullets, once again, would hide data).

Histograms are a standard way of presenting one-dimensional data in two-dimensional form. Our first step in building a histogram of the population data is the following AWK program, which counts how many states are in each "bin" of a million people.

```
awk '
BEGIN { bzs=0; bw=1e6 } # bin zero start; bin width
      { count[int(($3-bzs)/bw)]++ }
END   { for (i in count) print i, count[i] }
' <states.d | sort -n >states2.d
```

The variable bzs tells where bin zero starts; although it is zero in this graph, it might be 95 in a histogram of human body temperatures in degrees Fahrenheit. The program produces the following output in states2.d:


```
0 12
1 5
2 7
3 5
4 7
...
23 1
```

There are 12 states with population between 0 and 999,999, 5 states with population between 1,000,000 and 1,999,999, and so on.

This GRAP program uses three line commands to plot each rectangle in the histogram.

```
frame invis bot solid
label bot "Populations (in Millions) of the 50 States"
label left "Number" "of" "States" left .3
ticks bot out from 0 to 25 by 5
coord x 0,25 y 0,13
copy "states2.d" thru X
  line from $1,0 to $1,$2
  line from $1,$2 to $1+1,$2
  line from $1+1,$2 to $1+1,0
X
```


It produces

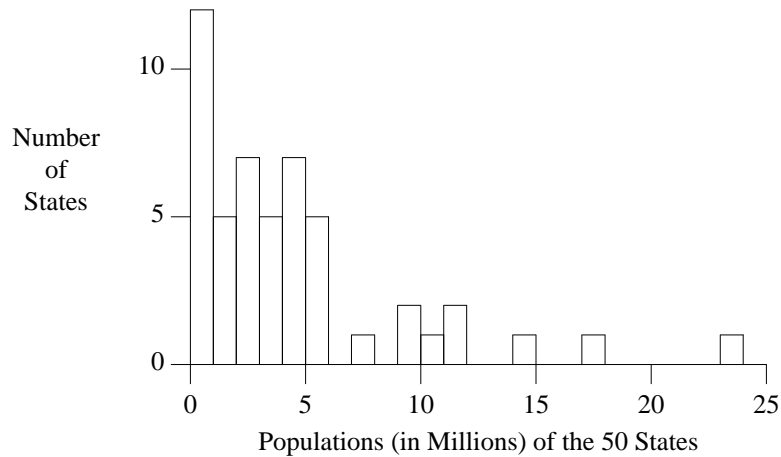

The same file can be plotted in a more attractive (and more useful) form by

```
frame invis bot solid left solid
label bot "Populations (in Millions) of the 50 States"
label left "Number" "of" "States" left .3
ticks bot out from 0 to 25 by 5
coord x 0,25 y 0,13
copy "states2.d" thru X
  line dotted from $1+.5,0 to $1+.5,$2
  "\(bu" size -3 at $1+.5,$2
X
```

which produces one of Bill Cleveland's "dot charts" or "lollipopplots":

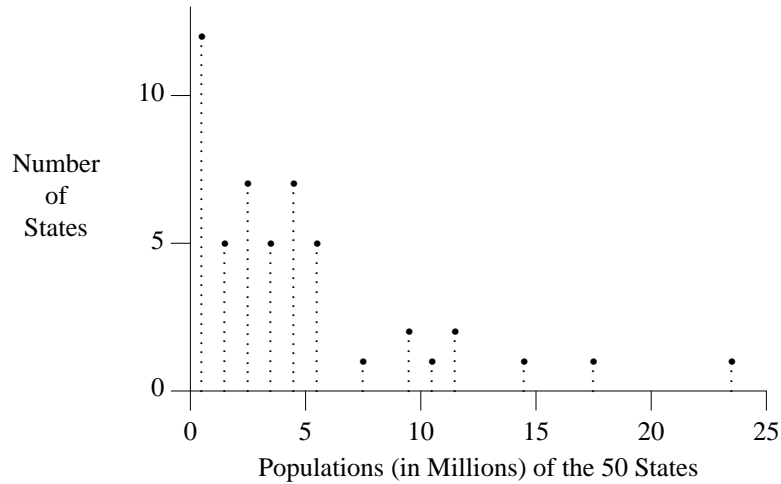

(We use \ (bu, the TROFF character for a bullet, rather than the built-in string to get a larger size.)

Other histograms are possible. The following AWK program

```
awk '
BEGIN { bzs=0; bw=1e6 } # bin zero start; bin width
      { thisbin=int(($3-bzs)/bw); print $1, thisbin, count[thisbin]++ }
' <states.d >states3.d
```


produces the file states3.d

```
AK 0 0
WY 0 1
VT 0 2
DE 0 3
ND 0 4
...
CA 23 0
```

which lists the state's abbreviation, bin number, and height within the bin. The GRAP program

```
frame invis wid 4 ht 2.5 bot solid
ticks bot out from 0 to 25 by 5
ticks left off
label bot "Populations (in Millions) of the 50 States"
coord x 0,25 y 0,13
copy "states3.d" thru X "$1" size -4 at $2+.5, $3+.5 X
```

reads that file to make the following histogram, in which the state names are used to display the heights of the bins. In each bin, the states occur in increasing order of population from bottom to top.

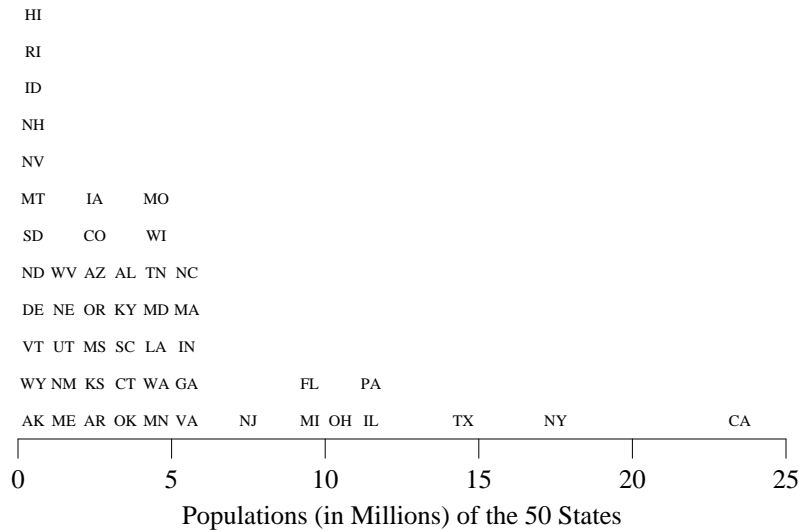

The next data set is a run-time profile of an early version of GRAP, created by compiling the program with the `-p` option and running `prof` after the program executed.

%time	cumsecs	#call	ms/call	name
21.1	11.02	26834	0.41	<code>__yylook</code>
11.2	16.89	30	195.60	<code>__yyparse</code>
9.3	21.75			<code>__doprnt</code>
9.1	26.52			<code>__write</code>
...				
0.0	52.19	170	0.00	<code>__tickside</code>

Although there were more than fifty procedures in the program, the top four time-hogs accounted for more than half of the run time. This file is difficult for GRAP to deal with: even though `if` statements would allow us to extract lines 2 through 11 of the file, we could not remove the leading “`__`” from a routine name or access the last field in a record. We will therefore process it with the following AWK program.

```
awk '
NR==2, NR==11 { print $1, substr($NF,2) }
' <prof1.d >prof2.d
```

The program produces


```
21.1 yylook
11.2 yyparse
9.3 __doprnt
9.1 write
5.9 input
...
2.0 nextchar
```

We could even use the `sh` statement to execute the AWK program from within the GRAP program, which would make the latter entirely self-contained (see the reference manual for details).

We will display the data with this program.

```
ticks left off
cury=0
barht=.7
copy "prof2.d" thru X
  line from 0,cury to $1,cury
  line from $1,cury to $1,cury-barht
  line from 0,cury-barht to $1,cury-barht
  " $2" ljust at 0,cury-barht/2
  cury=cury-1
X
line from 0,0 to 0,cury+1-barht
bars=-cury
frame invis ht bars/3 wid 3
```

Observe that the program knows nothing about the range of the data. It uses default ticks and a frame statement with a computed height to achieve total data independence.

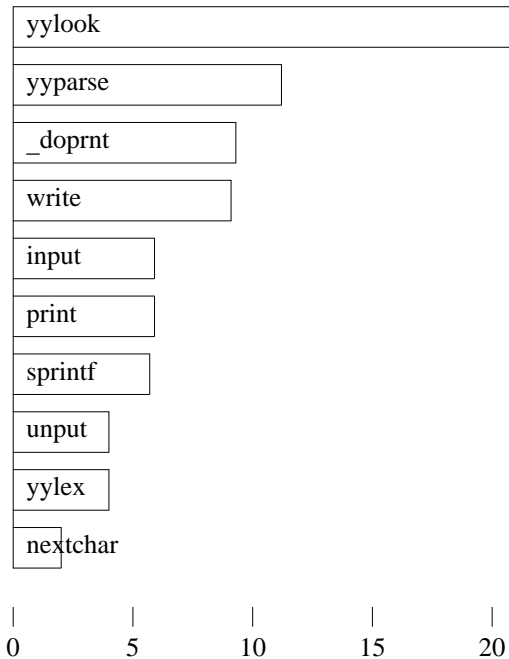


This bar chart highlights the fact that most of the time spent by GRAP is devoted to input and output.

J. W. Tukey's box and whisker plots represent the median, quartiles, and extremes of a one-dimensional distribution. The following GRAP program defines a macro to draw a box plot, and then uses that shape to compare the distribution of heights of volcanoes with the distribution of heights of States of the Union.


```
frame invis ht 4 wid 3 bot solid
ticks off
coord x .5,3.5 y 0,25
define Ht X "- $1,000 -" size -3 at 2,$1 X
Ht(5); Ht(10); Ht(15); Ht(20)
"Highest Point" "in 50 States" at 1,23
"Heights of" "219 Volcanoes" at 3,23
"Feet" at 2,21.5; arrow from 2,22.5 to 2,24
define box X #(x,min,25%,median,75%,max,minname,maxname)
  xc=$1; xl=xc-boxwidth/2; xh=xc+boxwidth/2
  y1=$2; y2=$3; y3=$4; y4=$5; y5=$6
  bullet at xc,y1
  " $7" size -3 ljust at (xc,y1)
  line from (xc,y1) to (xc,y2) # lo whisker
  line from (xl,y2) to (xh,y2) # box bot
  line from (xl,y3) to (xh,y3) # box mid
  line from (xl,y4) to (xh,y4) # box top
  line from (xl,y2) to (xl,y4) # box left
  line from (xh,y2) to (xh,y4) # box right
  line from (xc,y4) to (xc,y5) # hi whisker
  bullet at xc,y5
  " $8" size -3 ljust at (xc,y5)
X
boxwidth=.3
box(1, .3, 2.0, 4.6, 11.2, 20.3, Florida, Alaska)
box(3, .2, 3.7, 6.5, 9.5, 19.9, Ilhanova, Guallatiri)
```

Boxes are one of many shapes used for the graphical representation of several quantities. If you use such shapes frequently then you should make a library file of their macros to copy into your GRAP programs. The above program produces

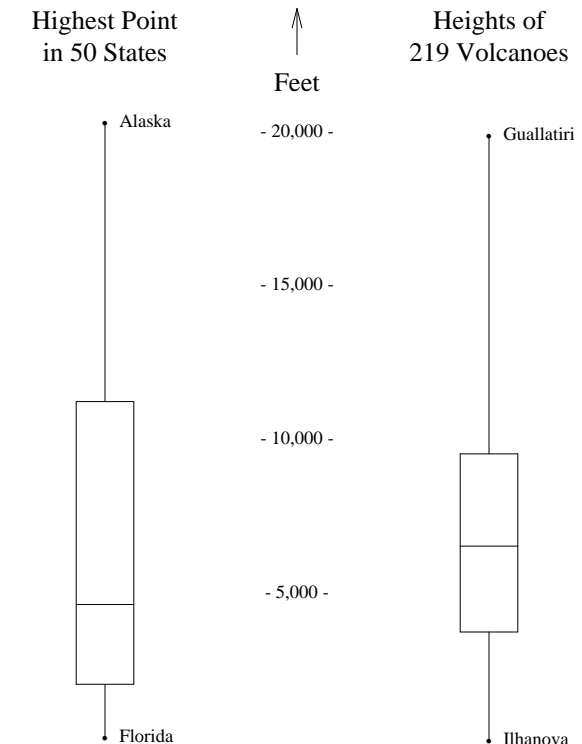


Even though the extreme heights are the same, state heights have a lower median and a greater spread.

Someday you may use GRAP to prepare overhead transparencies, only to find that everything comes out too small. The following program illustrates some ways to get larger graphs.

```
.ps 14
.vs 18
frame ht 2 wid 2
label left "Response" "Variable" left .5
label bot "Factor Variable"
line from 0,0 to 1,1
line dotted from .5,0 to .5,1
define blob X "\v'.2m'\(bu\v'-.2m'" X
blob at 0,.5; blob at .5,.5; blob at 1,.5
.ps
.vs
```

The `ps` and `vs` commands preceding the graph set the text size to 14 points and the vertical spacing to 18 points; the two quantities are reset by the commands following the `.G2`. Such size changes should be made outside the GRAP program, as mentioned earlier. The 4 following the `.G1` stretches the graph (including GRAP's estimate of the accompanying text) to be four inches wide; it is an alternative to altering the `frame` command. The macro `blob` is a plotting symbol that is much larger than `bullet`; the different name ensures that later references to `bullet` are unaffected. The TROFF commands within the `blob` string move the character down two-tenths of an em to center its plotting position (determined experimentally) and then reset the vertical position. The program produces this trivial (but large) graph.

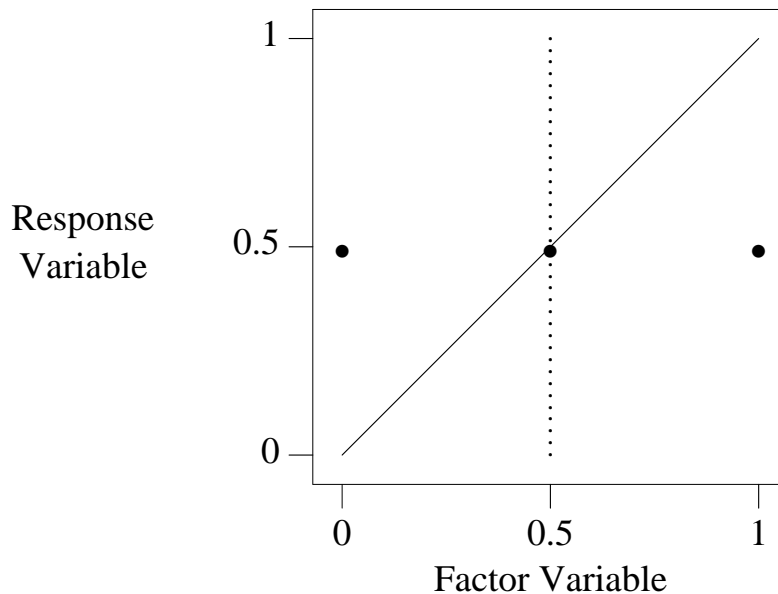

4. Using GRAP

Following are a few day-to-day matters about using GRAP.

Errors:

GRAP attempts to pinpoint input errors; for example, the input

```
.G1
i = i + 1
```

results in this message on `stderr`:

```
grap: syntax error near line 1, file -  
context is  
i = i >>> + <<< 1
```

The error was noticed at the +. Unfortunately, pinpointing is not the same as explaining: the real error is that the variable `i` was not initialized.

The “words” `x` and `y` are reserved (for the `COORD` statement); you will get an equally inexplicable syntax error message if you use them as variable names.

GRAP tries to load a file of standard macro definitions (`/usr/lib/grap.defines`) for terms like `bullet`, `plus`, etc., but doesn’t complain if that file isn’t found. If you later use one of these words, however, you’ll get a syntax error message.

Certain constructs suggested by analogy to PIC do not work. For example, `.GS` and `.GE` would have been nicer than `.G1` and `.G2`, but they were already taken. The PIC construct

```
.PS <file
```

has been superseded by GRAP’s `copy` command (which in turn has been retrofitted into PIC).

TROFF issues:

You may use TROFF commands like `.ps` or `.ft` to change text sizes and fonts within a graph, or balanced `\s` and `\f` commands within a string. Do not, however, add space (`.sp`) or change the line spacing (`.vs`, `.ls`) within a graph. Some defined terms like `bullet` contain embedded size changes; further qualifying them with GRAP `size` commands may not always work.

Because GRAP is built on top of PIC, the following quote from the PIC manual is relevant: “There is a subtle problem with complicated equations inside PIC pictures — they come out wrong if EQN has to leave extra vertical space for the equation. If your equation involves more than subscripts and superscripts, you must add to the beginning of each such equation the extra information `space 0`”. This feature was illustrated on page 20.

Alternatives:

Besides GRAP and your local draftsman, what other choices are there?

The S system provides a host of tools for statistical analysis, but somewhat fewer tools than GRAP for producing document-quality graphs. S produces graphs on the screen of a 5620 terminal much more quickly than GRAP (often in seconds rather than minutes), but it takes somewhat longer to learn (at least for us). If you expect to do a lot of interactive data analysis, then S is probably the right tool for you. S may be used to generate PIC commands.

The standard Unix program GRAPH provides many of the basic features of GRAP, though with quite a bit less control over details, particularly text. It produces output only in the Unix plot language, which may be processed by a variety of filters for a variety of output devices.

The original Unix typesetter graphics programs are PIC and IDEAL; you may be able to do as well without using GRAP as an intermediary. In particular, IDEAL provides shading and clipping, which are useful in presentation-quality bar charts and the like, but are well beyond the capabilities of PIC.

The Analyst’s Workbench family of programs includes a plotting package called D. The DISSPLA software purveyed by Bell Labs computer centers has extensive facilities for drawing graphs.

5. Reference Manual

In the following, *italic* terms are syntactic categories, `typewriter` terms are literals, parenthesized constructs are optional, and ... indicates repetition. In most cases, the order of statements, constructs and attributes is immaterial.

```

grap program :
    .G1 (width in inches)
    grap statement
    . . .
    .G2

```

A width on the .G1 line overrides the computed width, as in PIC.

```

grap statement :
    frame | label | coord | ticks | grid | plot | line | circle | draw | new | next
    | graph | numberlist | copy | for | if | sh | pic | assignment | print

```

The *frame* statement defines the frame that surrounds the graph:

```

frame :
    frame (ht expr) (wid expr) ((side linedesc) ...)
side :
    top | bot | left | right
linedesc :
    solid | invis | dotted (expr) | dashed (expr)

```

Height and width default to 2 and 3 inches; sides default to solid. If *side* is omitted, the *linedesc* applies to the entire frame. The optional expressions after *dotted* and *dashed* change the spacing exactly as in PIC.

The *label* statement places a label on a specified side:

```

label :
    label side strlist ... shift
shift :
    left | right | up | down expr ...
strlist :
    str ... (rjust | ljust | above | below) ... (size ( $\pm$ ) expr) ...
str :
    "... "

```

Lists of text strings are stacked vertically. In any context, string lists may contain clauses to adjust the position or change the point size. Each clause applies to the string preceding it and all following strings.

Normally the coordinate system is defined by the data, with 7 percent extra on each side. (To change that to 5 percent, assign 0.05 to the GRAP variable *margin*, which is reset to 0.07 at each .G1 statement.) The *coord* statement defines an overriding system:

```

coord :
    coord (name) (x expr,expr) (y expr,expr) (log x | log y | log log)

```

Coordinate systems can be named; ranges, logarithmic scaling, etc., are done separately for each.

The *ticks* statement places tick marks on one side of the frame:

```

ticks :
    ticks side (in | out (expr)) (shift) (tick-locations)
tick-locations :
    at (name) expr (str), expr (str), ...
    | from (name) expr to expr (by (op) expr) str

```

If no ticks are specified, they will be provided automatically; *ticks off* suppresses automatic ticks. The optional expression after *in* or *out* specifies the length of the ticks in inches. The optional name refers to a coordinate system. If *str* contains format specifiers like %f or %g, they are interpreted as by *printf*. If no *str* is supplied, the tick labels will be the values of the expressions.

If the *by* clause is omitted, steps are of size 1. If the *by* expression is preceded by one of +, -, * or /, the step is scaled by that operator, e.g., *10 means that each step is 10 times the previous one.

The `grid` statement produces grid lines along (i.e., perpendicular to) the named side.

```
grid :
    grid side (linedesc) (shift) (tick-locations)
```

Grids are labeled by the same mechanism as `ticks`.

Plot statements place text at a point:

```
plot :
    strlist at point
plot expr (str) at point
point :
    (name) expr,expr
```

As in the `label` statement, the string list may contain position and size modifiers. The `plot` statement uses the optional format string as in the C `printf` statement — it may contain a `%f` or `%g`. The optional name refers to a coordinate system.

The `line` statement draws a line or arrow from here to there:

```
line :
    (line | arrow) from point to point (linedesc)
```

The `circle` statement draws a circle:

```
circle :
    circle at point (radius expr)
```

The radius is in inches; the default size is small.

The `draw` statement defines a sequence of lines:

```
draw :
    draw (name) linedesc (str)
```

Subsequent data for the named sequence will be plotted as a line of the specified style, with the optional `str` plotted at each point. The `next` statement continues a sequence:

```
next :
    next (name) at point (linedesc)
```

If a line description is specified, it overrides the default display mode for the line segment ending at `point`. The `next` statement starts a new sequence; it has the same format as the `draw` statement.

A line consisting of a set of numbers is treated as a family of points x, y_1, y_2 , etc., to be plotted at the single x value.

```
numberlist :
    number ...
```

If there is only one number it is treated as a y value, and x values of 1, 2, 3, ... are supplied automatically.

GRAP provides arithmetic with the operators `+`, `-`, `*` and `/`. Variables may be assigned to; assignments are expressions. Built-in functions include `log`, `exp` (both base 10 — beware!), `int` (truncates towards zero), `sin`, `cos` (both use radians), `atan2(dy,dx)`, `sqrt`, `min` (two arguments only), `max` (ditto), and `rand()` (returns a real number random on [0,1)).

The `for` statement provides a modest looping facility:

```
for :
    for var from expr to expr (by (op) expr) do X anything X
```

`X` is any single character that doesn't appear in the string. If `X` is a left brace `{`, then the string may contain internally balanced braces and is terminated by a right brace `}`. The text *anything* (which may contain new-lines) is repeated as `var` takes on values from `expr1` to `expr2`. As with tick iterators, the `by` clause is optional, and may proceed arithmetically or multiplicatively. In a `for` statement, the `from` may be replaced by `“=”`.

The `if-then-else` statement provides conditional evaluation:

```
if:
    if expr then X anything X else X anything X
```

The `else`-clause is optional. Relational operators include `==`, `!=`, `>`, `>=`, `<`, `<=`, `!`, `||`, and `&&`. Strings may be compared with the operators `==` and `!=`.

GRAP provides the same macro processor that PIC does:

```
define macro_name X anything X
```

Subsequent occurrences of the macro name will be replaced by the string, with arguments of the form `$n` replaced by corresponding actual arguments. Macro definitions persist across `.G2` boundaries, as do values of variables.

The `copy` statement is somewhat overloaded:

```
copy "filename"
```

includes the contents of the named file at that point;

```
copy "filename" thru macro_name
```

copies the file through the macro; and

```
copy thru macro_name
```

copies subsequent lines through the macro; each number or quoted string is treated as an argument. In each case, copying continues until end of file or the next `.G2`. The optional clause `until str` causes copying to terminate when a line whose first field is `str` occurs. In all cases, the macro can be specified inline rather than by name:

```
copy thru X macro body X
```

The `sh` command passes text through to the Unix shell.

```
sh:
    sh X anything X
```

The body of the command is scanned for macros. The built-in macro `pid` is a string consisting of the process identification number; it can be used to generate unique file names.

The `pic` command passes text through to PIC with the “`pic`” removed; variables and macros are not evaluated. Lines beginning with a period (that are not numbers) are passed through literally, under the assumption that they are TROFF commands.

The `graph` statement

```
graph:
    graph Picname (pic-text)
```

defines a new graph named *Picname*, resetting all coordinate systems. If any `graph` commands are used in a GRAP program, then the statement after the `.G1` must be a `graph` command. The *pic-text* can be used to position this graph relative to previous graphs by referring to their `Frames`, as in

```
graph First
...
graph Second with .Frame.w at First.Frame.e + (0.1,0)
```

Macros and expressions in *pic-text* are not evaluated. *Picnames* must begin with a capital letter to satisfy PIC syntax.

The `print` statement

```
print:
    print (expr | str)
```

writes on `stderr` as GRAP processes its input; it is sometimes useful for debugging.

Many reserved words have synonyms, such as `thru` for `through`, `tick` for `ticks`, and `bot` for `bottom`.

The `#` introduces a comment, which ends at the end of the line. Statements may be continued over several lines by preceding each newline with a backslash character. Multiple statements may appear on a single line separated by semicolons. GRAP ignores any line that is entirely blank, including those processed by `copy thru` commands.

When GRAP is first executed it reads standard macro definitions from the file `/usr/lib/grap.defines`. The definitions include `bullet`, `plus`, `box`, `star`, `dot`, `times`, `htick`, `vtick`, `square`, and `delta`.

Summary of GRAP Commands

In the following, *italic* terms are syntactic categories, `typewriter` terms are literals, parenthesized constructs are optional, and ... indicates repetition. In most cases, the order of statements, constructs and attributes is immaterial.

```
grap program:
    .G1 (width in inches)
    grap statement
    ...
    .G2
grap statement:
    frame | label | coord | ticks | grid | plot | line | circle | draw | new | next
    | graph | numberlist | copy | for | if | pic | assignment | print
    | define | copy | sh
frame: frame (ht expr) (wid expr) ((side linedesc) ...)
side: top | bot | left | right
linedesc: solid | invis | dotted (expr) | dashed (expr)
label: label side strlist ... shift
shift: left | right | up | down expr ...
strlist: str ... (rjust | ljust | above | below) ... (size ( $\pm$ )expr) ...
str: "... "
coord: coord (name) (x expr,expr) (y expr,expr) (log x | log y | log log)
ticks: ticks side (in | out (expr)) (shift) (tick-locations)
tick-locations:
    at (name) expr (str), expr (str), ...
    | from (name) expr to expr (by (+ | - | * | /) expr) str
grid: grid side (linedesc) (shift) (tick-locations)
plot: strlist at point | plot expr (str) at point
point: (name) expr,expr
line: (line | arrow) from point to point (linedesc)
circle: circle at point (radius expr)
draw: draw (name) linedesc (str)
new: new (name) linedesc (str)
next: next (name) at point (linedesc)
numberlist: number ...
for: for var from expr to expr (by (+ | - | * | /) expr) do X anything X
if: if expr then X anything X else X anything X
graph: graph Picname (pic-text)
print: print (expr | str)
define: define macro_name X anything X
copy: copy ("filename") (thru macro_name | X macro body X) (until "endstring")
sh: sh X anything X
pic: pic anything
assignment: var = expr
X: any single character, or braces { }
```

Predefined strings include `bullet`, `plus`, `box`, `star`, `dot`, `times`, `htick`, `vtick`, `square`, and `delta`. Built-in functions include `log` (base 10), `exp` (base 10), `int`, `sin`, `cos`, `atan2`, `sqrt`, `min`, `max`, and `rand`.

Typesetting is the composition of text by means of arranging physical types or the digital equivalents. Stored letters and other symbols (called sorts in mechanical systems and glyphs in digital systems) are retrieved and ordered according to a language's orthography for visual display. Typesetting requires one or more fonts (which are widely but erroneously confused with and substituted for typefaces). One significant effect of typesetting was that authorship of works could be spotted more easily. Dubbed troff, for typesetter roff, its sophisticated output amazed the typesetter manufacturer and confused peer reviewers, who thought that manuscripts using troff had been published before. [1][2] As such, the name troff is pronounced /tɪˈɒf/ rather than *trɒf/. With troff came nroff (they were actually almost the same program), which was for producing output for line printers and character terminals. It understood everything troff did, and ignored the commands which were not applicable, e.g., font changes. ^ GRAP ^ A Language for Typesetting Graphs (Tutorial and User Manual). CSTR #114, Bell Labs, August 1984. ^ J. L. Bentley, L. W. Jelinski, and B. W. Kernighan. CHEM ^ A Program for Typesetting Chemical Structure Diagrams. This paper is primarily a user's manual for pic; a discussion of design issues and user experience may be found in [6]. The next section shows how to use pic in the most simple way. Subsequent sections describe how to change the sizes of objects when the defaults are wrong, and how to change their positions when the standard positioning rules are wrong. An appendix describes the language succinctly and summarizes changes since the last manual. 2. Basics. Pic provides boxes, lines, arrows, circles, ellipses, arcs, and splines (smooth curves), plus facilities for positioning and labeling them... ^ 3. Bentley, J.L. and Kernighan, B.W. GRAP ^ A Language for Typesetting Graphs. CACM 29, 8 (August, 1986), 782-792. - 21 -. 4. Cherry, L.L. and Lesk, M.E. Tbl ^ A Program to Format Tables. described in ``Grap-A Language for Typesetting Graphs, Tutorial and User Manual," by Jon L. Bentley and Brian W. Kernighan, revised May 1991, which is the primary source for information on how to use grap. As of this writing, it is available electronically at. <http://www.kohala.com/start/troff/cstr114.ps>. Additional documentation and examples, packaged with grap, may have been installed locally as well. If available, paths to them. can be displayed using `grap -h` or `grap -v` (or `grap --help / grap --version`). This version is a black box implementation of grap, and some inco user's manual seems to have the following elements: a systematic summary of all the commands. User's Manual as a Requirements Specification. Article. Jul 2001. ^ Bentley, J.L. and Kernighan, B.W. GRAP ^ A Language for Typesetting Graphs. CACM 29, 8 (August, 1986), 782-792. PIC ^ A Language for Typesetting Graphics. Article. Jan 1981. ^ PIC is a language for specifying pictures so that they can be typeset as an integral part of a document preparation system. The basic objects in PIC are boxes, lines, arrows, circles, ellipses, arcs and splines, which may be placed anywhere and labeled with arbitrary text. Most of the effort in designing PIC has gone into making it possible to specify the sizes and positions of objects with minimal use of absolute coordinates.